



OL Plus Series - High Pressure, Single Phase, Riser Mount Air Compressors for Dry Pipe Sprinkler Systems

OL Plus Series

- Oil Less Piston Compressor
- UL Listed Pressure Switch
- Riser Mounting Kit *included*
- 30" SS Flex Hose *included (NEW)*
- Bubble tight air check valve
- Permanently lubricated bearings
- Integrated Air Intake Filters
- Fully automatic, direct drive
- 60 Hz (cycle)
- **Max Pressure: 100 PSI**



- Specifically designed to fill the sprinkler system to 40 PSI in 30 minutes as per NFPA 13.


System Capacity**	Model Number	Average CFM*	Motor HP	Minimum Wire Size +	Dimensions			Weight (lbs)
					L	W	H	
250 gal.	OL25033AC-HP	3.03	1/3	12	16"	12"	12"	31
365 gal.	OL36550AC-HP	4.43	1/2	12	16"	15"	10"	38
430 gal.	OL430100AC-HP	5.21	1	10	17"	15"	10"	48
550 gal.	OL550100AC-HP	7.46	1	6	17"	15"	10"	48
915 gal.	OL915200AC-HP	11.10	2	6	23"	15"	10"	60
1100 gal.	OL1100200AC-HP	14.85	2	10	24"	15"	11"	70

Accessories:

Magnetic Line Starters - Thermal Overload Protection Single Phase

	115V	208/230V	Size	Model
Maximum HP	1/3 HP	1 HP	00	MG00A
	1 HP	2 HP	0	MGX0A
	2 HP	3 HP	1	MG01A
	3 HP	5 HP	1P	MG15A

When Ordering a Motor Starter you **must** specify HP, Voltage and Phase that is supplied to the motor.

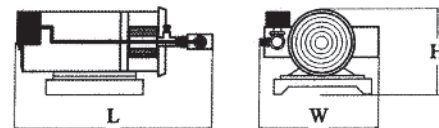

VOLTAGE: All Single Phase Units 115 or 208-230 Volt except OL1225200AC which is 208-230 only.

* Average CFM is the average free air delivery from 0 to 40 PSIG.

+ Based on 100 foot run at weakest electrical supply. Consult Factory for longer or shorter runs.

** Based on 70 degree F system temp. For other conditions consult factory for pump up times.

++ OLRTK Riser Tank Kit may be required, consult factory.